

Confidentiality level class 2:

This document intended for a restricted public only (Official Elinchrom agents, partners, suppliers, manufacturers or outsourcers). Any third party dissemination, distribution, copying or use of these documents, without prior permission, is strictly prohibited.

Upgrade Style RX 300/600 230V Pilot lamp (E27 to GX6.35)



This document describes how to replace the Pilot lamp E27 socket by the new GX6.35 socket on the compact **Style 300RX 230V** and **Style 600RX 230V**.

Compact Style RX with E27 Pilot lamp (23018)

Compact Style RX with GX6.35 Pilot lamp (23034)



New spare parts needed for the upgrade

<i>Item number</i>	<i>Description</i>	<i>Image</i>
23034	Halogen Lamp 200W/240V GX6.35	
659.006	Reflector Style RX Premounted	

Confidentiality level class 2:

This document intended for a restricted public only (Official Elinchrom agents, partners, suppliers, manufacturers or outsourcers). Any third party dissemination, distribution, copying or use of these documents, without prior permission, is strictly prohibited.

Upgrade Process


1. Be sure that the Style RX unit is discharged and disconnected from the mains before open.



2. Use a clean glove to remove the flashtube.
Remove the pilot lamp E27 and the inner reflector.



3. Remove the E27 socket on the board PB2 14373RX.
Do not remove the socket contacts on the board (see picture)

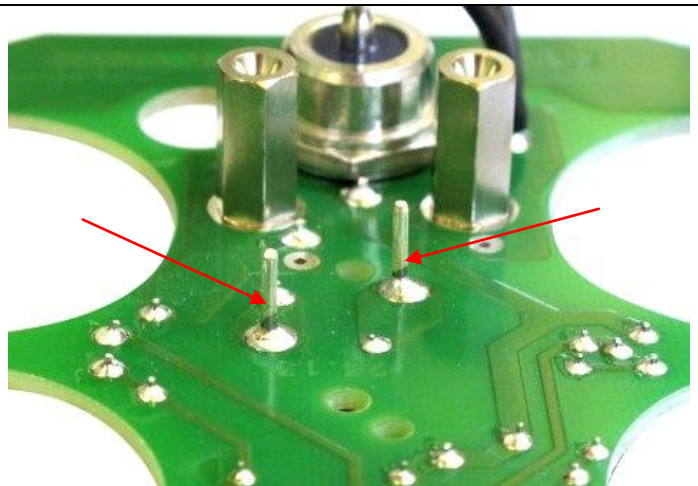

Confidentiality level class 2:

This document intended for a restricted public only (Official Elinchrom agents, partners, suppliers, manufacturers or outsourcers). Any third party dissemination, distribution, copying or use of these documents, without prior permission, is strictly prohibited.

4. Mount the new inner reflector 659.006 and connect the lamp socket to the contacts on the 14373RX board.



5. Use a clean glove to plug the flashtube and the new pilot lamp GX6.35 (23034)



6. Modification done

